

RF LAYOUT

Application Guide

Version: V2.3

Date: Nov. 10th, 2022

This document provided by DREAMLNK is mainly used to guide your RF design base on our RF modules. The specifications and parameters provided here are just for your reference, hope it can help you in some way on your future product design.

DREAMLNK does not assume any responsibility for personal injury or property loss caused by improper operation. Prior to this declaration, DREAMLNK reserves the right to update this document in the future. And if you need any help on RF modules, or relative Antennas, please feel free to contact us, with contact details shown as below:

SHENZHEN DREAMLNK TECHNOLOGY CO., LTD

Add.: 601-603, Bldg C, Zone A, Huameiju Plaza, Xinhu Rd., Bao'an District, Shenzhen 518101, Guangdong, China

Skype: wsj.james **Wechat:** wsj_james

Mobile: +86-13760215716 **E-mail:** james@dreamlnk.com

Web (CN): www.dreamlnk.com **Web (EN):** www.iot-rf.com



Notice: The copyright of this document belongs to **SHENZHEN DREAMLNK TECHNOLOGY CO., LTD,** and any person who reproduce it without permission will bear the legal responsibility.

Copyright © SHENZHEN DREAMLNK TECHNOLOGY CO., LTD. 2022.

Document Revision History

Version	Date	Approved by	Revision of Contents
1.0	2014-08-08	Knight Ai	Original Version
2.0	2016-09-20	Tim Wang	1. New template adopted 2. Update the module reference schematic
2.1	2020-03-18	Fagan Xu	Add description of applicable modules
2.2	2022-04-10	Fagan Xu	Update Figure 6 (PCB LAYOUT Instance Diagram)
2.3	2022-11-10	Fagan Xu	Update Chapter 2 and Chapter 5

Contents

Cover 1

Document Revision History 2

Contents 3

Image Indexing 4

1. Foreword 5

2. Suggestions on Schematic Diagram of RF Interface 6

3. Structure Design of Coplanar Waveguide with 50Ω Impedance 7

4. Example and Precautions of Coplanar Waveguide PCB LAYOUT 9

5. Supplementary Instruction 10

Image Indexing

Figure 1: Reference Schematic Diagram of the RF Module 6

Figure 2: Coplanar Waveguide Structure Diagram 7

Figure 3: LAYOUT Diagram of Two Layers PCB 8

Figure 4: LAYOUT Diagram of Four Layers PCB (Reference Grounding is the 3rd Layer) 8

Figure 5: LAYOUT Diagram of Four Layers PCB (Reference Grounding is the 4th Layer) 8

1. Foreword

This document mainly introduces the PCB Layout precautions of the RF circuit, which is surrounding the RF module. The main purpose is to help you correctly design the PCB routing when using our RF modules, so as to ensure the RF performance and reduce the design cycle of the products.

This INSTRUCTION is applicable to all the Sub-GHz and 2.4GHz RF modules produced by DreamLNK, which include 433/868/915MHz RF modules, 2.4G RF modules, FSK transceiver modules, Bluetooth modules, LoRa modules, UART module, etc.



You may visit our website (www.iot-rf.com) to know more about our RF modules! If any product meets your demand, please feel free to contact James Wu (james@dreamlnk.com)

2. Suggestions on Schematic Diagram of RF Interface

2.1 General Recommended RF Circuit:

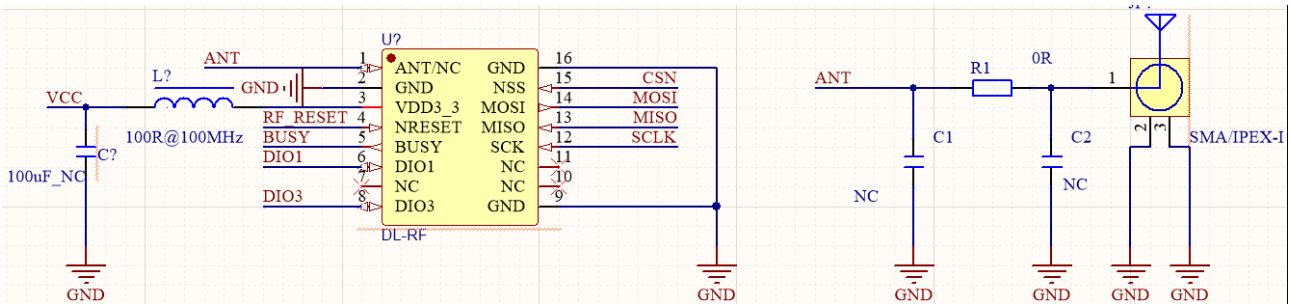


Figure 1: Reference Schematic Diagram of the RF Module

Note: C1, R1 and C2 are reserved matching circuits to optimize the RF performance of the antenna. The default value is: R1 = 0R Resistance; C1 = NC; C2 = NC

2.2 Circuits Routing Precautions:

1) Please reserve a **π-matching circuit** as above **Figure 1** on your PCBA, for eventual RF performance optimization in antenna design.
2) The π-matching circuit should be placed on the path between the module's ANT pin and the antenna connector, as close as possible to the antenna connector or antenna feed point. This is because the on-board π network is intended for antenna impedance matching, not chip-level matching (which is already done inside our modules). The circuit should be grounded with multiple vias and connected through a 0Ω resistor; otherwise, the antenna will be open.
3) The π-matching circuit consists of three components as shown in Figure 1. (See Section 4, Note 6 for the L-shaped matching option when space is limited.)
4) Sensitive IC should be away from RF module or shielding. The RF module should be also far away from interference sources, such as high-frequency circuit, switching power, transformer, etc.
5) Do not route any signal or power traces directly underneath the RF module. The ground plane beneath the module should be kept solid to provide a stable RF reference. Otherwise, the receiving sensitivity may be affected.
6) The product shell (especially the area above antenna part) should not be electroplated or use metal material.

3. Structure Design of Coplanar Waveguide with 50Ω Impedance

It is recommended to adopt coplanar waveguide microwave transmission form with characteristic impedance of 50Ω, as shown in Figure 2 as below:

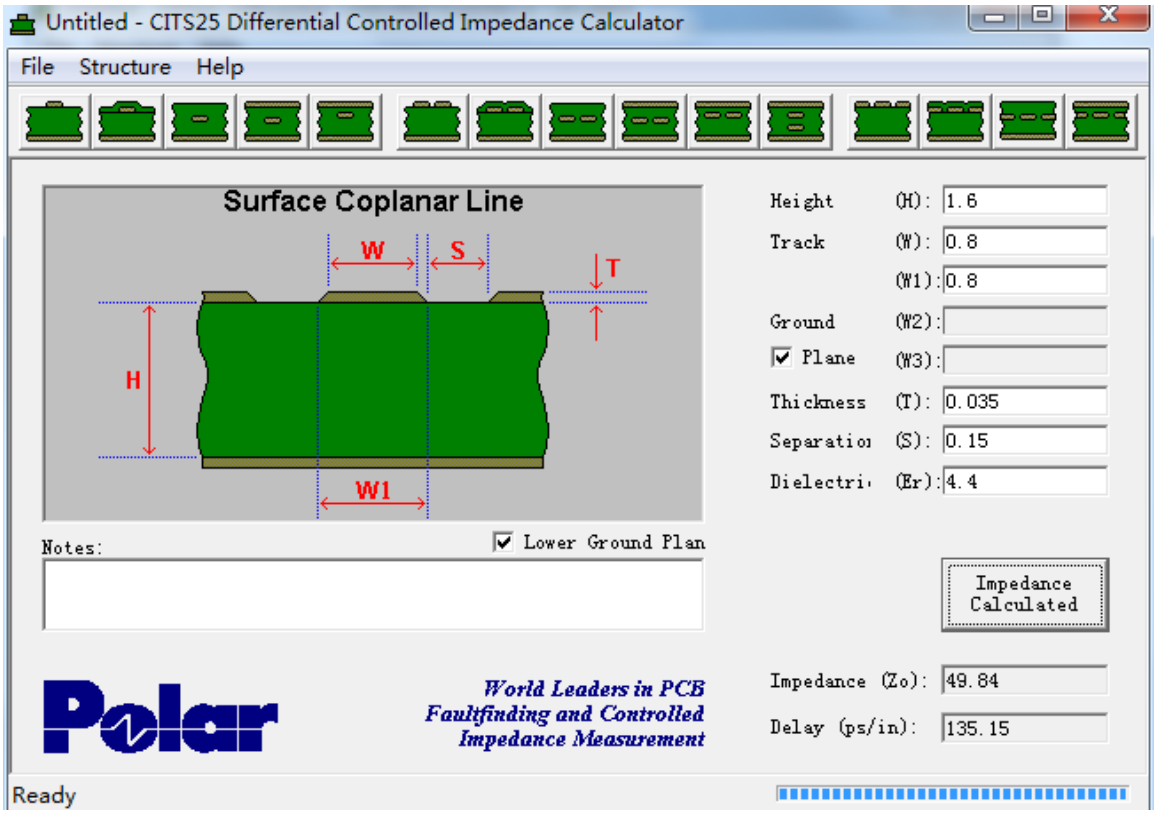


Figure 2: Coplanar Waveguide Structure Diagram

The main factors affecting the characteristic impedance of coplanar waveguide include the Dielectric Constant of Substrate (usually 4.2~4.6, here is 4.4), Height between Signal Layer and Reference Ground Layer (H), Microstrip Linewidth (W), Ground Clearance (S) and Copper Foil Thickness (T).

Table 1 lists the recommended Microstrip Linewidth (W) and Ground Clearance (S) corresponding to 50ohm impedance, with height between different Signal Layers and Reference Ground Layers (H), as well as the Copper Foil Thickness (T) = 0.035mm

Table 1: Recommended Values for Coplanar Waveguide with 50Ω Impedance

Height between Signal Layer and Reference Ground Layer (H)	Microstrip Linewidth (W)	Ground Clearance (S)
0.076mm	0.1188mm	0.15mm
0.1mm	0.1623mm	0.2mm
0.15mm	0.24mm	0.2mm

0.8mm	0.8mm	0.18mm
1.0mm	0.8mm	0.17mm
1.2mm	0.8mm	0.16mm
1.6mm	0.8mm	0.15mm
2mm	0.8mm	0.14mm

If it is a 2-layer PCB, the signal layer is the Top layer and the Reference Ground Layer is the Bottom layer, as shown in Figure 3 below. If it is a 4-layer PCB, the Reference Ground Layer can be the second layer, the third layer or the fourth layer. If the Reference Ground Layer is the third layer, the layer(s) between the signal layer and the reference ground layer shall be prohibited from copper pour, with a keepout width of at least 2W on each side (total ≈5W), as shown in Figure 4 below. If the Reference Ground Layer is the 4th layer, the 2nd and 3rd layers directly below the signal layer shall be prohibited from copper pour, with a keepout width of at least 2 times the linewidth on each side (total ≈5W), as shown in Figure 5 below. If it is a 6-layer PCB, the above rules are similar…

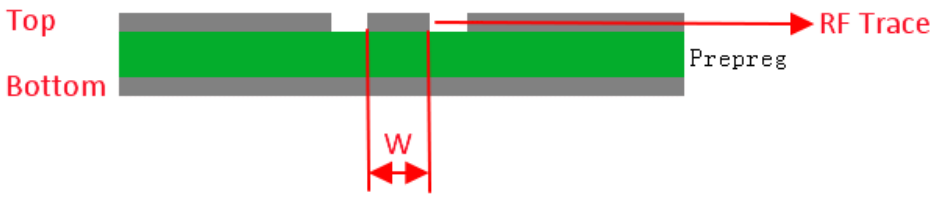


Figure 3: LAYOUT Diagram of Two Layers PCB

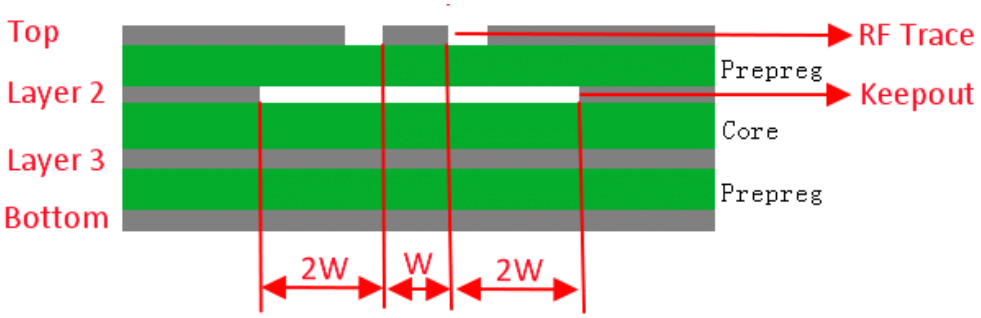


Figure 4: LAYOUT Diagram of Four Layers PCB (Reference Grounding is the 3rd Layer)

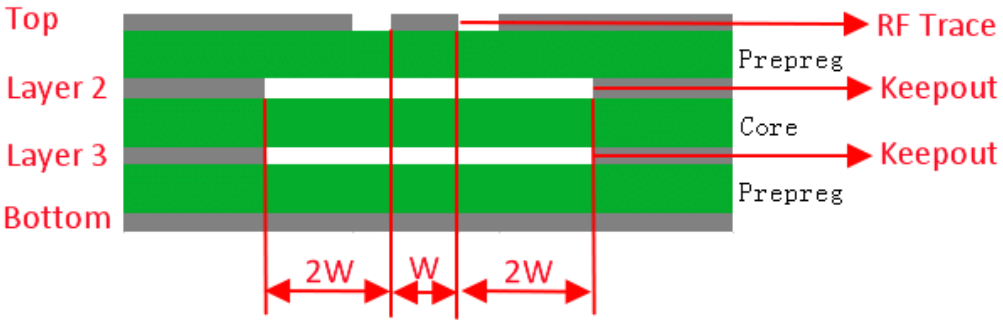


Figure 5: LAYOUT Diagram of Four Layers PCB (Reference Grounding is the 4th Layer)

Note: Here is an experimental formula to calculate the Microstrip Lines:

Z (Microstrip) = {87/[sqrt(Er+1.41)]} ln [5.98H/(0.8W+T)]

Remark:

1). W is the Microstrip linewidth, T is the copper foil/plate thickness (of the microstrip lines), H is the Height between Signal Layer and Reference Ground Layer, and Er is the dielectric constant of the PCB board material.

2). This formula provides a microstrip-line approximation only. For precise coplanar waveguide impedance values, please use simulation tools such as Polar.

4. Example and Precautions of Coplanar Waveguide PCB LAYOUT


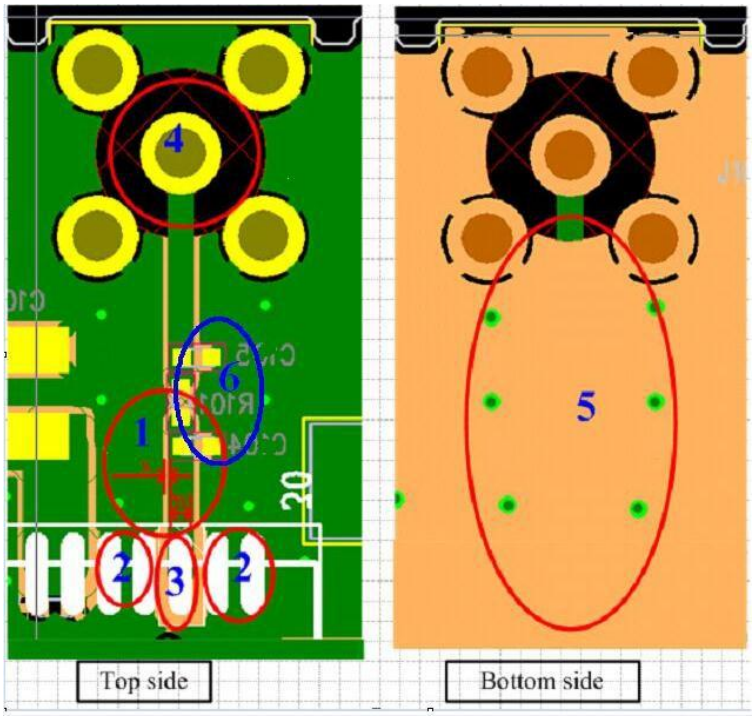


Figure 6: PCB LAYOUT Instance Diagram

Referring the above figure with the numeric symbol, there are six tips to note:

1) Strictly control the Microstrip Linewidth (W) and Ground Clearance (S) corresponding to 50-ohm coplanar waveguide. For example, with the common PCB plates as FR4 media (dielectric constant e.g., 4.2~4.4) and copper coating thickness 35um, the Microstrip Linewidth (W) and Ground Clearance (S) corresponding to the different signal layers are shown in Table 1. It is particularly reminded that PCB factories need to control Microstrip Linewidth (W) and Ground Clearance (S) accuracy.
2) The ground pins of the RF connector (SMA) do not require a thermal relief pad; they should be solidly connected to the ground plane with multiple vias.
3) A local copper keepout on the surface layer is recommended to reduce parasitic effects. The RF line should be as short as possible, and it is best to avoid routing at right angles. If there is a corner, it is recommended to go 135 degrees.

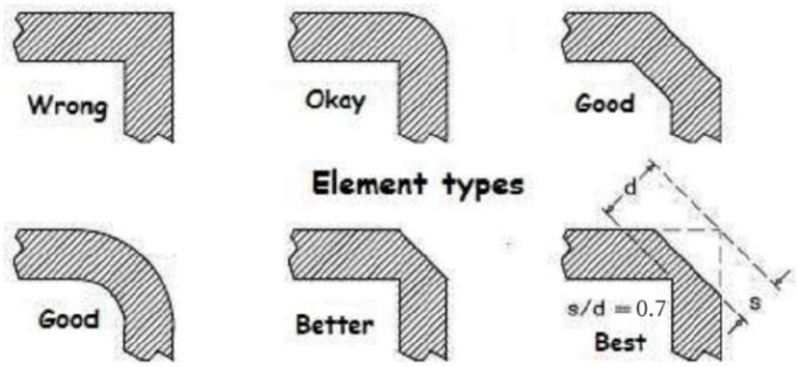

4) When connecting the components package, it should be noted that the signal pin should be kept at a certain distance from the ground. Refer to Figure 6. Please do not lay copper at the bottom of the signal pad.
5) Please ensure the integrity of the reference ground layer corresponding to the RF routing, and increase the grounding hole to help the RF return, and keep the distance between the ground hole and the signal line at least twice the line width. Ensure that the grounding area of the same layer of RF line is as large as possible, the reference ground of the other side should be also as complete as possible, and ensure that a certain number of ground holes are connected to two layers of ground.
6) The π type matching circuit is normally constituted of 3 components (as shown in Figure 1). When designing, the pad should be placed close to the antenna connector/feed point (as shown in the above figure 6). If the space between the antenna connector (SMA) and the RF pin of the module is not enough (impossible to place the three components of the π matching circuit), it can be changed to an L-shaped matching circuit.

5. Supplementary Instruction

5.1 RF circuits are quite sensitive to power supply noise, especially burr voltage and other high frequency harmonics. Therefore, decoupling capacitance must be added to some digital integrated circuits.
5.2 DC regulator power supply with small power ripple factor is recommended, while a magnetic bead can be added to the VDD pin of the RF module; and the power load capacity of Max. transmitting power needs to be considered as well.
5.3 Power supply should preferably reach the recommended voltage. Low voltage will affect the power output of the RF modules, especially those with PA, although it may still operate.
5.4 Try to keep the signal line in the same PCB layer and close to the power layer or ground layer. Keep the power layer as close to the ground layer as possible.
5.5 Please choose a suitable antenna according to your needs, and try to find an appropriate position to place the antenna (according to antenna's polarization). Normally the antenna should be vertical stand on the base board.